

P4R

4" Miniature Remodel Recessed Non IC
Incandescent Downlight

Catalog Number: _____

Type: _____

Project: _____



Description

For remodel construction. Thermally protected recessed housing. Fixture is c/ETL Listed for through-branch circuit wiring and damp location use.

Features

- Compact size permits installation with 2X6 joist construction and as close as 8" on center.
- 50 watt maximum.
- Thermal protection standard.
- c/ETL listed for damp locations and through branch circuit wiring.
- Wide variety of trim options.
- Pre-installed socket.
- Non-IC rated.

CATALOG SYSTEM AND OPTIONS

SAMPLE CATALOG NUMBER: P4R-P4BW

HOUSING	TRIMS (choose only one)
P4R	-
	P4BW White Baffle, white flange
	P4B Black Baffle, white flange
	P4RC Clear reflector; white flange
	P4RG Gold reflector; white flange
	P4RB Black reflector; white flange
	P4RW White reflector; white flange
	P4WW Wall wash, white baffle, white scoop
	P4WB Wall wash, black baffle, white scoop
	P4F Fresnel lens, white flange, wet location listed

General Notes:

See Trims on reverse side of the sheet for lamp compatibility.

SPECIFICATIONS

- Housing** - Deep drawn 22 gauge steel single piece housing painted white. Adjusts vertically in frame to accommodate ceiling thickness up to 1-3/8" thick. Ceiling opening 4-1/4". Accommodates lamp up to 50 watts depending on trim used.
- Socket**- Medium base screw shell porcelain socket attached to adjustable socket supporting bracket.
- Installation** - designed for installation below finished ceiling. Four retractable spring clips hold fixture tight into the ceiling.


4. **Junction Box** - 14 cu. inch, 18 gauge galvanized steel with two snap-on covers and grounding pigtail. Knock-outs for 1/2" and 3/4" conduit. Meets all safety requirements of c/ETL and N.E.C.

5. **Thermal Protection** - Standard thermal protection device inside housing automatically takes the fixture out of service if temperature becomes excessive from over lamping or wrong lamp/trim combination.

6. **C/ETL Listed** - for damp locations and through-branch wiring, 3 in/3 out.

7. **Trims** - Spun and stamped steel is powder coated in a variety of colors. Features three spring steel, friction fit clips for a secure hold within the housing.

DIMENSIONS

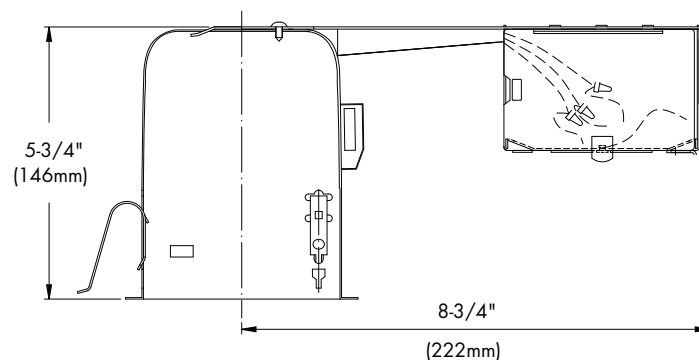

REV. 09/11



P4BW (Shown)
White Baffle w/white flange

P4B
Black baffle w/white flange
5" O.D. (127 mm)

Lamp	Non-IC Only
R20	50W
PAR20	50W



P4RC (Shown)
Clear reflector w/white flange

P4RG
Gold reflector w/white flange
5" O.D. (127 mm)

Lamp	Non-IC Only
R20	50W
PAR20	50W



P4RB (Shown)
Black reflector w/white flange

P4RW
White reflector w/white flange
5" O.D. (127 mm)

Lamp	Non-IC Only
R20	50W
PAR20	50W



P4VWV (Shown)
Wall wash, white baffle w/white scoop

P4VWB
Wall wash, black baffle w/white scoop
5" O.D. (127 mm)

Lamp	Non-IC Only
R20	50W
PAR20	50W



P4GW
White Adjustable Gimbal

P4GB
Black Adjustable Gimbal
4-7/8" O.D. (124 mm)

Lamp	Non-IC Only
R20	50W
PAR20	50W



P4EW (Shown)
White Eyeball

P4EB
Black Eyeball
5" O.D. (127 mm)

Lamp	Non-IC Only
R20	50W
PAR20	50W



P4F
Fresnel Lens. Wet Location Listed

5" O.D. (127 mm)

Lamp	Non-IC Only
R20	50W
PAR20	50W

Capri Lighting reserves the right to make changes without notice.©2010