


COMPACT FLUORESCENT HIGH BAY LUMINAIRE


The HBC Compact Fluorescent High Bay Luminaire features open, acrylic reflectors for maximum efficiency in gymnasiums, warehouses, educational, retail and commercial applications where uplight is required.

DIMENSIONS

AR16 & AR19

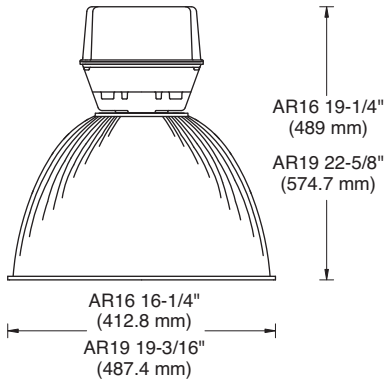

AR22 & AR25

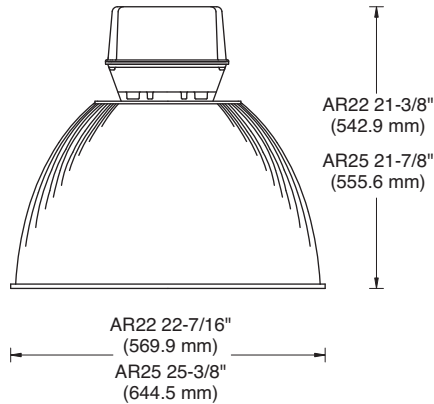

For areas where optical assemblies are subject to impact (gymnasiums, etc.) use appropriate full wire cage as shown on page 731. Installation using a hook, cord and plug for flexibility is also recommended.

Custom cord & plug assemblies may be required for multi-level switching. Consult factory for availability.

42 WATT AMBIENT TEMPERATURE RATINGS				
REFLECTOR	LAMPS	AMBIENT-°C	OPEN	ENCLOSED
AR16	4-42W	40	✓	✓
AR19	4-42W	40	✓	✓
AR19	6-42W	25	✓	✓
AR19	6-42W	30	✓	N/A
AR22	6-42W	40	✓	✓
AR22	8-42W	30	✓	N/A
AR25	6-42W	40	✓	✓
AR25	8-42W	30	✓	N/A

AMBIENT TEMPERATURE RATINGS				
REFLECTOR	LAMPS	AMBIENT-°C	OPEN	ENCLOSED
AR19	4-57W	40	✓	✓
AR22	4-57W	40	✓	✓

SAMPLE CATALOG NUMBER*: **HBC826/32/42CU-AR22**

HBC	C	U	-	-	-	
FAMILY HBC	WATTAGE 26/32/42 57 (4 lamp only)	VOLTAGE U - Universal 108-305 volts 50Hz or 60Hz	LAMP SOURCE C - Compact Fluorescent	LAMP QUANTITY 2 or 4 - 16" Reflector 4 or 6 - 19" Reflector 6 or 8 - 22" Reflector 6 or 8 - 25" Reflector	OPTICAL ASSEMBLY AR16 - Open 16" Acrylic Reflector AR19 - Open 19" Acrylic Reflector AR19T - Open 19" Translucent Acrylic Reflector AR22T - Open 22" Translucent Acrylic Reflector AR22 - Open 22" Acrylic Reflector AR25 - Open 25" Acrylic Reflector	OPTIONS D1 - Electronic Dimming Ballast for (1) Lamp (57 watt only) D2 - Electronic Dimming Ballast for (2) Lamps D4 - Electronic Dimming Ballasts for (4) Lamps WSF - Wired Single Fuse (120 or 277) WDF - Wired Double Fuse (200 or 240) EM - Wired for Use With DEB-9 Emergency Ballast (order separately) DEB-9 to be Remote Mounted Within 3' of HBC Luminaire (not available in 57 watt) See pages 724-732 for accessories

General Notes:
All options are factory installed.
GX24q lamp base only
All accessories are field installed.
Data subject to change without notice

Lens Accessories (order separately)

- 16FL - 16" Flat Acrylic Lens
- 16CL - 16" Conical Acrylic Lens
- 16DL - 16" Drop Acrylic Lens
- 19FL - 19" Flat Acrylic Lens
- 19CL - 19" Conical Acrylic Lens
- 22FL - 22" Flat Acrylic Lens
- 22CL - 22" Conical Acrylic Lens
- 22DL - 22" Drop Acrylic Lens
- 25FL - 25" Flat Acrylic Lens
- 25DL - 25" Drop Acrylic Lens

Features

- Heavy wall, two piece die cast aluminum housing with white polyester powder finish for excellent corrosion and impact resistance.
- Injection molded acrylic prismatic reflector.
- Electronic ballasts and locking sockets are standard.
- Luminaire comes fully assembled.
- All Ballast Leads are in wiring compartment to facilitate wiring for multi-level switching in the field.
- UL 1598 listed for use in damp location applications.



HBC

COMPACT FLUORESCENT HIGH BAY LUMINAIRE

Day-Brite® Lighting