


# STAIRWELL LUMINAIRE

The Stairwell Luminaire is a wall or ceiling mounted luminaire with an integral ultrasonic occupancy sensor to provide energy savings in areas of occasional use.

## STAIRWELL LUMINAIRE—PRODUCT AVAILABILITY

Size	Family	Lamps/ Fixture	Lamp Type	Length in. (mm)	Width in. (mm)	Depth in. (mm)
2'	STW	1, 2	17	29-3/4" (756)	4-3/16" (106)	4-1/2" (114)
3'	STW	1, 2	25	41-3/4" (1060)	4-3/16" (106)	4-1/2" (114)
4'	STW	1, 2	32	53-3/4" (1365)	4-3/16" (106)	4-1/2" (114)

## DIMENSIONS

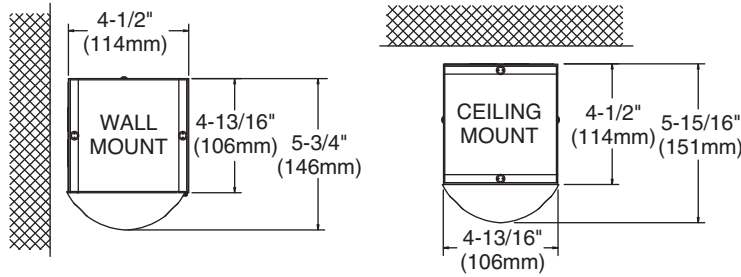

### Accessories

- **TPDTH** – Tamperproof driver, Torx head pin drive (required with TR option)

### Features

- Ideal for use in stairwells.
- Available for wall mount or ceiling mount applications.
- Wall mount models use 180° sensor, ceiling mount models use 360° sensor.
- Standard models dim fully when occupancy is not detected, on/off switching option available.
- Choice of clear prismatic or white opal lenses.
- Heavy-duty fixed steel end plates.
- Optional internal reflector (**REF**) concentrates light onto floor when no upright is required.
- Wire guard optional.
- Optional vandal resistant lenses are .125" high impact acrylic.
- Tamper resistant (**TR**) option prevents unauthorized lens removal. **Tamperproof driver (Cat.# TPDTH) required (sold separately).**
- Housing is multi-stage phosphate treated for maximum corrosion resistance and finish coat is high reflectance baked white enamel.
- UL listed for damp locations. Models incorporating emergency ballasts UL listed for dry locations.



SAMPLE CATALOG NUMBER: **STWW232-CP-120-1/2-EBD**

## STW

**FAMILY**  
STW – Stairwell

**NO. OF LAMPS/  
CROSS SECTION**  
(not included)

1  
2

### LENS

**CP** – Clear prismatic  
**WO** – White opal (smooth)  
**VCP** – Vandal resistant .125" clear prismatic  
**VWO** – Vandal resistant .125" white opal (smooth)

### BALLAST

**1/1-EBD** – One 1-lamp electronic dimming ballast  
**1/2-EBD** – One 2-lamp electronic dimming ballast

### OPTIONS

**CM** – Canadian Market  
**E1** – DEB-1 emerg. ballast, 350-450 lumens, UL dry loc.  
**E7** – DEB-7 emerg. ballast, 600-700 lumens, UL dry loc.  
**E5** – DEB-5 emerg. ballast, 1100-1350 lumens, UL dry loc.  
**ES5T** – DEB-5ST emerg. ballast w/self test, 1100-1400 lumens, UL dry loc.  
**WG** – Wire Guard  
**TR** – Tamper Resistant  
**REF** – Internal Reflector  
**OFF** – On/Off Switching (substitute EB for EBD in ballast designator)  
**GLR#** – Fusing, fast blow (# = number of ballasts)

### MOUNTING

**C** – Ceiling  
**W** – Wall

### LAMP TYPE/WATTAGE

**17** – 17wT8 (24")  
**25** – 25wT8 (36")  
**32** – 32wT8 (48")

### VOLTAGE

**120**  
**277**  
**UNV** – Universal Voltage, 120-277 volt

See pages 186-192 for option info. See pages 202-203 for ballast and lamp info.